## Q-Control

# SMART CONTROL OF YOUR PUMP OPERATIONS





Q-Control is an integrated pump controller for Quattroflow multiple-use and single-use pumps. It interfaces with a variety of flow and pressure sensors to provide user with automated control over their pump operations. With built-in smart control functions that no longer requires an external PLC, Q-Control leads to a new generation of Quattroflow biopharma pumps.



#### **FEATURES**

- Integrated pump controller that interfaces with different flow and pressure sensors
- Smart control functions that usually require an external PLC
- PID control mode for pressure- or flow-controlled pump operations
- Autotune function to automatically find optimal PID parameters
- Configurable alarms to stop the pump
- Dispensing feature to automatically fill defined volumes of liquid
- RS485 Modbus communication port
- Trend data and alarm logging
- Remote operation
- Available for Quattroflow quaternary diaphragm pump models QF30, QF150, QF1200, QF2500, QF4400 and QF5k

### **FEATURES**

Functions	Description
Manual Mode	Manual motor speed selection
Manual Flow	Manual motor speed selection with flow calculation
External Mode	External pump control
Dispense Mode	Automated dispensing of preconfigured volumes
Pressure control Mode	Automated pressure control e.g. for filtration; requires a connected pressure sensor
Flow control Mode	Automated flow control, e.g. for cross-flow control; requires a connected flow sensor
Alarms	Free configurable alarms
PIN Codes	PIN code protection of configuration settings
USB Port	Backup of system configuration setting     Data logging     Installation of firmware updates




### **EXTERNAL CONNECTIONS**

I/O Signals	Potential use
Up to 3 x analog input 4-20mA* 1 x analog input 0-10 VDC incl. 24 VDC supply voltage for sensors	External sensor (e.g. pressure and/or flow) External pump control
3 x digital inputs	Diaphragm monitoring External start/stop High pressure switch
1 x RS485 (Modbus RTU)	Signal monitoring Pump remote control

<sup>\*</sup> Number of freely configurable analog inputs depends on selected option

### **OPTION: DIRECT CONNECTION FOR SINGLE-USE SENSORS**

Sensor	Description
Pressure	Integrated PendoTECH® PressureMAT® Transmitter (PT60; up to 60 psi / 4,14 bar) for direct connection of PendoTECH® SU pressure sensors; use of pressure signal for alarms or pressure control (PID)
Flow	Integrated transmitter FlowMCP-a for direct connection of the PSG Biotech BioProTT™ Ultrasonic Clamp-On Sensors; use of flow signal for flow control (PID)

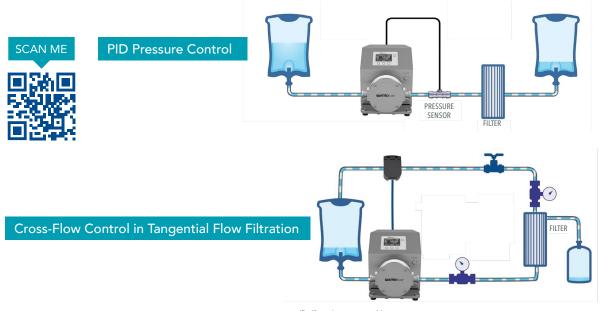

(For illustration purposes only)

PBT-Q-10000-F-01 © 2023 PSG®, a Dover company

Authorized PSG® Partner:



PSG Germany GmbH | Quattroflow Hochstraße 150-152 47228 Duisburg, Germany Tel: +49 (2065) 89205-0 Fax: +49 (2065) 89205-40 biotech@psgdover.com psgdover.com/quattroflow


### **EXTERNAL CONNECTIONS**

I/O Signals	Potential use
Up to 3 x analog input 4-20mA* 1 x analog input 0-10 VDC incl. 24 VDC supply voltage for sensors	External sensor (e.g. pressure and/or flow) External pump control
3 x digital inputs	Diaphragm monitoring External start/stop High pressure switch
1 x RS485 (Modbus RTU)	Signal monitoring Pump remote control

<sup>\*</sup> Number of freely configurable analog inputs depends on selected option

### **OPTION: DIRECT CONNECTION FOR SINGLE-USE SENSORS**

Sensor	Description
Pressure	Integrated PendoTECH® PressureMAT® Transmitter (PT60; up to 60 psi / 4,14 bar) for direct connection of PendoTECH® SU pressure sensors; use of pressure signal for alarms or pressure control (PID)
Flow	Integrated transmitter FlowMCP-a for direct connection of the PSG Biotech BioProTT™ Ultrasonic Clamp-On Sensors; use of flow signal for flow control (PID)

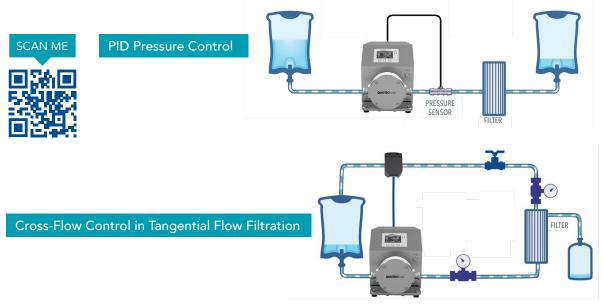

(For illustration purposes only)

PBT-Q-10000-F-01 © 2023 PSG®, a Dover company

Authorized PSG® Partner:



PSG Germany GmbH | Quattroflow Hochstraße 150-152 47228 Duisburg, Germany Tel: +49 (2065) 89205-0 Fax: +49 (2065) 89205-40 psg-germany@psgdover.com psgdover.com/quattroflow