



PureFlo® PTFE Cartridges

PureFlo® PTFE cartridges are validated sterilizing grade air filters with a robust design capable of withstanding multiple steam-in-place cycles. The hydrophobic, polytetrafluoroethylene (PTFE) membrane demonstrates exceptional flow performance in compressed air and venting applications in the biopharmaceutical industry.

Membrane Configurations

PureFlo® PTFE capsules incorporate a final sterilizing grade 0.2 µm membrane.

Engineered Filtration Solutions

To meet the needs of an innovative and rapidly growing industry, and in addition to the standard product offering, Saint-Gobain Life Sciences offers a collaborative service with a dedicated team of engineers and subject matter experts to develop specialized filtration solutions that are tailored to achieve optimal performance. Please contact us for more information.

Features / Benefits



Inherently Hydrophobic



100% Integrity Tested



Optimal Flow



Autoclavable



Steam Sterilizable



Broad Chemical Compatibility

Typical Applications

- Bioreactor Vent
- Moisture Barrier
- Compressed Gas
- Fermentation Tank Vent
- Autoclavable Vent



Technical Summary

Materials	
Membrane	Polytetrafluoroethylene (PTFE)
Support Material	Polypropylene (PP)
Molded Components (cage, core, shell, end caps)	Polypropylene (PP)
O-rings	Silicone
Adapter Insert (when present)	Stainless Steel (overmolded)

Membrane Configurations		
Membrane	Description	Minimum Bubble Point (at 22°C)
F020	0.2 µm	1.2 bar 17.4 psi (in 60% isopropyl alcohol and 40% water)

Measurements (nominal)		
Size	Outside Diameter (mm)	Filtration Area (cm ²)
Mini (MM)	56	730 - 2600
Full (M)	70	3650 - 26000

Operating Conditions		
	Mid (MM)	Full (MC)
Maximum Temperature	80°C	80°C
Maximum Forward Differential Pressure (at 22°C)	4.1 bar 59.5 psi	5 bar 72.5 psi

Sterilization	
Steam-in-Place (SIP)	Mini (MM): Up to 10 cycles at 135°C for 30 minutes Full (MC): Up to 50 cycles at 135°C for 30 minutes
Autoclave	Mini (MM): Up to 25 cycles at 135°C for 30 minutes Full (MC): Up to 50 cycles at 135°C for 30 minutes
Ethylene Oxide	Testing is recommended

Shelf Life

Non-sterile products have a shelf life of 3 years after the date of manufacture.

Traceability

For traceability and easy identification:

- A Certificate of Conformance is provided in each box.
- Each filter bag and box are labeled with the product part number, lot number, and identifying characteristics.
- Each cartridge is engraved and labeled with the product part number, lot number, and identifying characteristics.

Regulatory & Stewardship

Saint-Gobain Life Sciences' PureFlo® PTFE Cartridges were designed, manufactured, and qualified with an ISO 13485 certified Quality Management System. For more information, please refer to the Product Validation Guide and Regulatory Information Overview (RIO).

Category	Standard or Reference Test
Cleanliness	USP <85> Bacterial Endotoxin Test 21 CFR sections 211.72 and 210.3 (b) (6)
Biocompatibility	ASTM F756-17 Hemolysis USP <88> Class VI, and/or USP <87>, and/or ISO 10993-5
Bacterial Retention	Quantitative Retention of 10 ⁷ CFU/cm ² <i>Brevundimonas Diminuta</i> per ASTM methodology

Lot Release Criteria

Each PureFlo® PTFE cartridge product lot is sampled and tested for conformity to the following criteria:

Criteria	Description
Integrity (membrane)	Each filter (100%) in a lot is integrity tested during the manufacturing process.
USP Bacterial Endotoxins	A representative sample from the lot is tested to confirm that an aqueous extraction of the product contains <0.25 EU/mL as determined by the Limulus Amebocyte Lysate (LAL) Test.

PureFlo® PTFE

Full Size

Saint-Gobain
Life Sciences –
Bioprocess Solutions




PRODUCT TECH SNAPSHOT: (Values are nominal. Please see Technical Summary for additional information).

Filter Size	Body Diameter (mm)	Filtration Area (m ²)
5"	70	0.365
10"	70	0.73
20"	70	1.5
30"	70	1.9
40"	70	2.6

Typical pressure drop in air (22 °C) at 200 LPM is approximately 0.12 psid per 10" cartridge with code 7 adapter*

Ordering Guide

PART NUMBER:

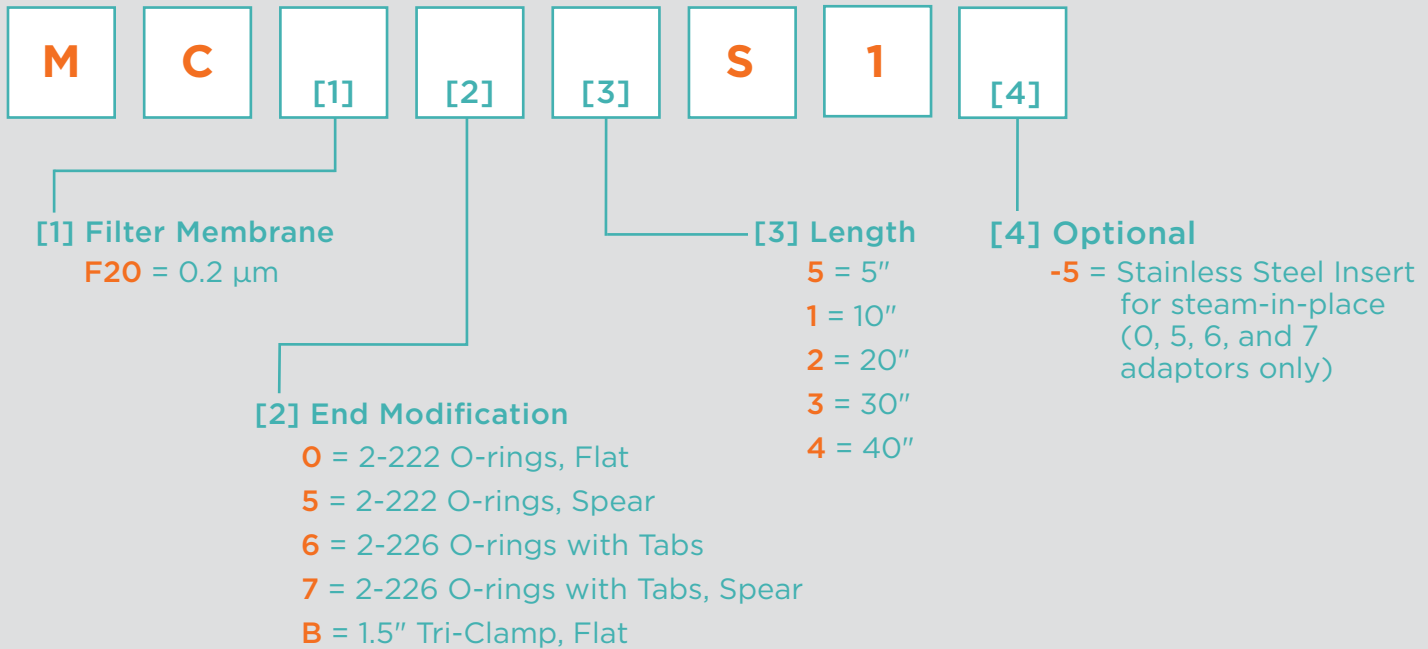

Customer Service

50 W. Watkins Mill Rd.
Gaithersburg, MD 20878
Tel: (301) 407-2720
Fax: (240) 566-5774
Email: info.ft@saint-gobain.com

www.biopharm.saint-gobain.com

Don't see what you're looking for?
Please let us know! We're here to help.

*IMPORTANT: The flow performance of a filter is dependent on several variables including the process fluid characteristics, operating conditions, filter surface area, pore size, and fittings. The above values are approximate for example part numbers and provided for reference only. Actual values may vary. For application guidance and flow performance information for a specific part number please contact your local Saint-Gobain Life Sciences representative.



PureFlo® is a registered trademark of Saint-Gobain Performance Plastics

Uncontrolled Document - for the controlled version of this document please visit www.biopharm.saint-gobain.com

**Contact us today for:
Consultations • Samples • Quotes • Orders**

**For registered access to Saint-Gobain Product Validation Summaries,
[CLICK HERE](#)**



Customer Service

50 West Watkins Mill Rd.
Gaithersburg, MD 20878

Tel: (301) 407-2720

Fax: (240) 566-5774

Email: info.ft@saint-gobain.com

www.biopharm.saint-gobain.com

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain Performance Plastics products for all intended uses and that the materials to be used comply with all applicable medical regulatory requirements. Saint-Gobain Performance Plastics assumes no responsibility for any product failures that occur due to misuse of the materials it provides arising out of the design, fabrication, or application of the products into which the materials are incorporated.

WARRANTY: For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product to be free of defects in materials and workmanship. Our only obligation will be to replace any portion proving defective, or at our option, to refund the purchase price thereof.

SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.